



ST3110D Optical Fiber Cleaver




I. Specification

ST3110D Optical Fiber Cleaver

Coating Diameter	0.25mm&0.9mm
Cladding Diameter	125um
Cleaving Angle	0.5°
Blade Life	48000 times
Blade Face	16
Weight	Approx. 280g
Dimension(mm)	58X55 X 52

II. Structure:

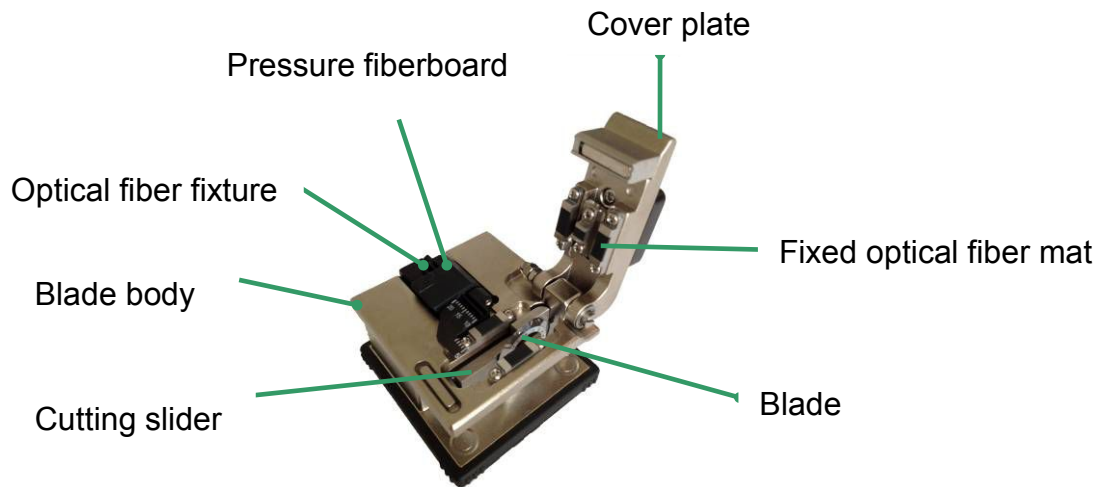


III. Operating Procedures

1. Open the pressure fiberboard and cover plate, put bare fiber in the fixture that was stripped coating (125mm/900mm), according to user's requirement to ensure cutting length.



2. Push to the front of the cutting slider (Figure), press and close the pressure fiberboard and cover plate to fix optical fiber.

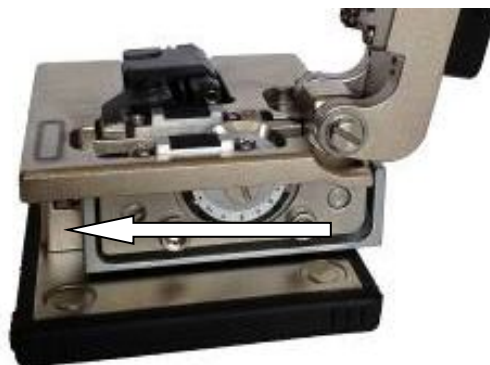

3. After close cover plate, ensure that the fiber is in a horizontal line.
4. Push cutting slider back a one-time to finish cutting.
5. Open cover plate and pressure fiberboard, then take out the fiber. In order to avoid damaging the fiber, fiber face don't touch anything after take it out.
6. After finish cutting, please clean up the broken fiber and don't damage blade for later use.

IV. Ordering Information

Standard Accessory	
ST3110D Optical Fiber Cleaver	1 pc
Carrying Bag	1 pc
Operation Manual	1 pc
Optional Accessory	
Replacement Blade	1 pc
Off-Cut Collector	1 pcs



Shandong Senter Electronic Co., Ltd.

Add: No.18, Liu Yishan Road, New&Hi-tech Area, Zibo City,
Shandong Province, China 255088

Tel: 86-533-3589257

Fax: 86-533-3587522/3589257

Email: export@senter.com.cn

Http: www.senter.com.cn

All information provided by Senter in this datasheet is believed to be accurate. Senter reserves the right to discontinue and change specifications and prices at any time without prior notice. For further details, please refer to our website www.senter.com.cn.